TACFLEX FLEXIBLE CONDUITS - Steel wire over braiding

tacflex

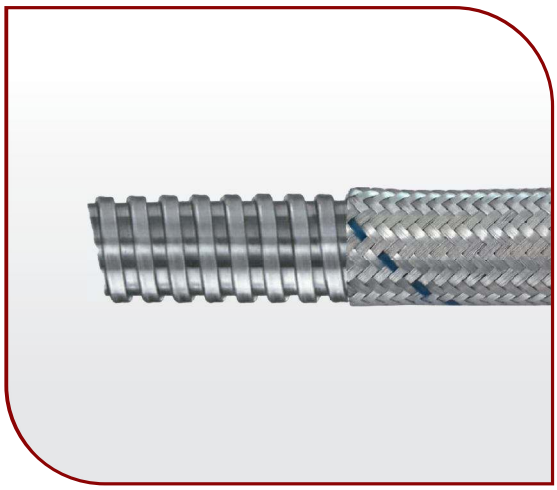

FLEXIBLE SPIRAL CONDUITS
STEEL WIRE OVER BRAIDING

TECHNICAL DETAILS

Material	: Galvanised steel galv. steel overbraid - tinned - copper wire
Certificates	: ROHS, CE, PT, TUV
	* SS overbraid version is available on request
Protection class	: IP40
Temperature range	: -100 °C +300 °C

Properties
High impact strength
Halogen free
Low fire hazard
Self-extinguishing
High abrasion resistance
EMC screening
Full-shrink packing
Screening factor upto 30 MHZ acc. to EN50289 1-6 upto 80dB



ÇELİK TEL ÖRGÜLÜ METAL SPİRAL BORULAR

Hammaddesi	:	Galvaniz & kalay kaplı sac
Örgü kaplaması	:	Galvaniz / Paslanmaz çelik
Sürekli ısıya direnci	:	-100 °C + 300 °C
		Emc screen özelliği

PRODUCT RANGE OVERVIEW

Code	Size	d mm.	d1 mm.	Roll Length mt.
CTS 9	1/4"	9	14	50
CTS 10	1/4"	10	15	50
CTS 11	3/8"	11	16	50
CTS 13	3/8"	13	17,5	50
CTS 16	1/2"	16	21	50
CTS 21	3/4"	21	26	50
CTS 26	1"	26	32	25
CTS 35	11/4"	35	41	25
CTS 40	11/2"	40	46	25
CTS 51	2"	51	57	25