


## Slingset Range Of Sling Protection

### Anti Abrasive Sleeves - AAS

- Heavy Duty Anti Abrasive Sleeves protect slingset slings from rough abrasive surface and prolonged sling life.
- Available in either clip-on from (with Velcro attachment) or Sewn into the length of the sling as required.

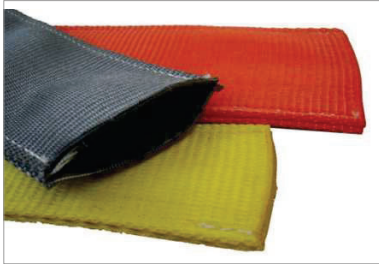

### Anti Cutting Sleeve - ACS

- Light Duty Anti Cutting Sleeves with Heavy Duty Kevlar (Found in Bullet Proof Vests) is sewn inside heavy duty covermax to protect sling from sharp edges during rigging. A must for rigging loads with sharp razor like edges

### Cornermax Sleeve Heavy Duty - CRNMX

- This cornermax cut protection device prevents an edge on the load from touching the slings. In fact the edge even does not touch the cornermax protector!
- This protector will handle the most extreme circumstances lifting steel and concrete

A comparison of Twin Path Vs the rest

Features	Slingset Twin Path	Slingset Single Path	Stee Wire ropes / Chains
100% back-up protection	✓	✗	✗
Overload Indicators	✓	Optional	✗
Fibre Optic inspection	✓	Optional	✗
Repairability	✓	✗	✗
Weight (Ratio)	1 (K-Spec Yarn)	5 (Polyester Yarn)	20 (80 Grade Steel)
Aging	✗	✗	✓
Rusting	✗	✗	✓
Damage to load	✗	✗	✓
Good Insulator	✓	✓	✗
Absorbs shocks	✓	✓	✗
High productivity	✓	✓	✗
Lower capital M/c downtime	✓	✓	✗
Easy visual inspection	✓	✓	✗
High Flexibility	✓	✓	✗
Low storage cost	✓	✓	✗
Low injury to workers	✓	✓	✗
Kinking / Twisting	✗	✗	✓
Grease / Hand gloves	✗	✗	✓
Long life / Durability	✓	✓	✗



## SpanSet Duplex Web Sling (B) to BS EN 1492-1, 7:1 Safety Factor

Span Setduplex web sling (B) to BS EN 1492-1, 7:1 Safety Factor		
Colour	Marked WLL (kg)	Spanset Make Width of Sling
Purple	1000	30
Green	2000	60
Yellow	3000	90
Gray	4000	120
Red	5000	150
Maroon	6000	180
Blue	8000	240
White	10,000	300



Protective Slewing



SpanSet Econolift Roundslings (E) to BS EN 1492-2, 7:1 Safety Factor				
Colour	Marked WLL	Minimum Length (m)	Maximum length (m)	Weight p/m (kg)
Purple	1000	0.5	15	0.35
Green	2000	0.5	15	0.5
Yellow	3000	0.5	15	0.6
Gray	4000	0.5	15	0.9
Red	5000	0.5	60	1
Maroon	6000	1	60	1.3
Blue	8000	1	60	1.7

### ROUNDSLINGS

Power Flex SLEEVE (PF-1)	SECUTEX SINGLE SIDED PROTECTIVE SLEEVE (SF-1)	SECUTEX SINGLE SIDED PROTECTIVE SLEEVE (SF-2)
<p>FOR EXTRA ABRASION PROTECTION Thanks to the PowerFlex coating</p> <p>For round slings <b>WLL 0.5t</b> — <b>40t</b> For web slings <b>WLL 1t</b> — <b>20t</b></p>	<p>Single sided Secutex* sleeve for anti-cut performance with flexibility</p> <p>For round slings <b>WLL 0.5t</b> — <b>150t</b> For web slings <b>WLL 1t</b> — <b>20t</b></p>	<p>Double sided Secutex* sleeve for anti-cut protection on both sides.</p> <p>For round slings <b>WLL 0.5t</b> — <b>150t</b> For web slings <b>WLL 1t</b> — <b>20t</b></p>

SECUTEX PROTECTIVE CLIP ON SLEEVE (SC)	SECUEV Protective Sleeve (SW) For "RAZAR SHARP EDGES"	SERFACE REINFORCEMENT (ST)
<p>Removable Single sided Secutex* sleeve</p> <p>For round slings <b>WLL 0.5t</b> — <b>150t</b> For web slings <b>WLL 1t</b> — <b>20t</b></p>	<p>For radii less than 2mm. Thanks to the wave design the Razor Sharp Edge is enveloped and held in place.</p> <p>Power Star <b>WLL 1t</b> — <b>10t</b> (CS) Double duplex <b>WLL 2t</b> — <b>20t</b></p>	<p>All Sectex Sleeves can have the extra steel protection.</p> <p><b>GROUND FINISH (G)</b></p> <p>The maintain grip for wet and oily condition</p>

## SPANSET Lifting Range



SpanSet Light Duty Lashing's								
Product ID	01802-1	01802-2	01861-1	01861-2	01805-1	01805-2	01806-1	01806-2
Description	Endless	Two Part	Endless	Two Part	Endless	Two Part	Endless	Two Part
Standard Fixed Length (mm)		300		300		500		500
Width (mm)	25	25	25	25	50	50	50	50
Standard Colour	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange
Webbing strength (kg)	1300	1300	1300	1300	1700	1700	3000	3000
EWL (metre)	6m	6m	6m	6m	6m	6m	6m	6m

SpanSet Medium and Heavy Duty lashing's						
Product ID	01138-1	01138-2	01148-1	01148-2	01150-1	01150-2
LC (daN)	750	375	2000	1000	2000	1000
Description	Endless	Two Part	Endless	Two Part	Endless	Two Part
Standard Fixed Length (mm)		500		500		500
Width (mm)	50	50	50	50	45	45
Standard Colour	Orange	Orange	Grey	Grey	Grey	Grey
Webbing strength (kg)	1700	1700	3000	3000	3000	3000
EWL (metre)	6m	6m	6m	6m	6m	6m

SpanSet Medium and Heavy Duty lashing's										
Product ID	01857-1	01857-2	20020-1	20020-2	20060-1	20060-2	20050-1	20050-2	20040-1	20040-2
LC (daN)	5000	2500	5000	2500	5000	2500	5000	2500	10000	5000
STF (daN)		450		450		500		500		
Description	Endless	Two Part	Endless	Two Part	Endless	Two Part	Endless	Two Part	Endless	Two Part
Standard Fixed Length (mm)		500		500		300		500		700
Width (mm)	50	50	50	50	50	50	50	50	75	75
Standard Colour	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange	Orange
Webbing strength (kg)	7500	7500	7500	7500	7500	7500	7500	7500	13500	13500
EWL (metre)	6m	6m	6m	6m	6m	6m	6m	6m	6m	6m



Magnum & Magnum Plus Round Slings (MG)



Magnum X Round Slings (MGX)



Supra Plus Round Slings (S)

## SpanSet Econolift Roundslings (E) to BS EN 1492-2, 7:1 Safety Factor



Wire Rope and Fittings



Shackles



Sling Saver Fittings



Rigging Accessories



Chain Accessories



McKissick Blocks



Hooks and Swivels



Crosby Lifting Clamps