


HEX SPACERS MOLDED WITH INSERTS (HEAVY DUTY)

Material : 30% Glassfilled Nylon 6


A/F	L	Threading	PART CODE
10	20	M4	SME1020M4NS
10	25	M4	SME1025M4NS
10	30	M4	SME1030M4NS
10	35	M4	SME1035M4NS
10	40	M4	SME1040M4NS

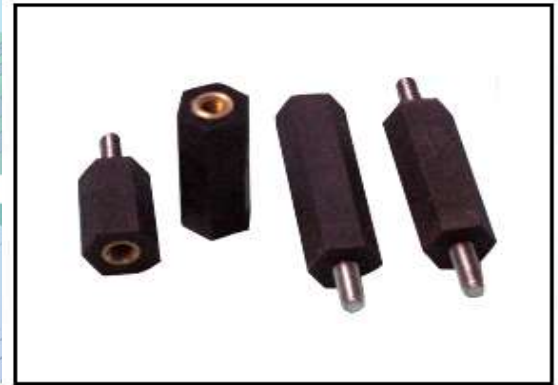

10	20	M4	SME1020M4SS
10	25	M4	SME1025M4SS
10	30	M4	SME1030M4SS
10	35	M4	SME1035M4SS
10	40	M4	SME1040M4SS

10	20	M5	SME1020M5NS
10	25	M5	SME1025M5NS
10	30	M5	SME1030M5NS
10	35	M5	SME1035M5NS
10	40	M5	SME1040M5NS

10	20	M5	SME1020M5SS
10	25	M5	SME1025M5SS
10	30	M5	SME1030M5SS
10	35	M5	SME1035M5SS
10	40	M5	SME1040M5SS

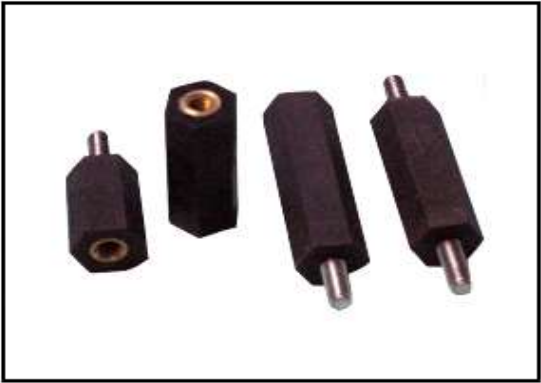



10	25	M5	SME1025M5NN
10	30	M5	SME1030M5NN
10	35	M5	SME1035M5NN
10	40	M5	SME1040M5NN

10	25	M4	SME1025M4NN
10	30	M4	SME1030M4NN
10	35	M4	SME1035M4NN
10	40	M4	SME1040M4NN


AVAILABLE SIZES

A/F	L	THREADING	PART CODE
10	20	M4	SME1020M4SS
10	25	M4	SME1025M4SS
10	30	M4	SME1030M4SS
10	35	M4	SME1035M4SS
10	40	M4	SME1040M4SS

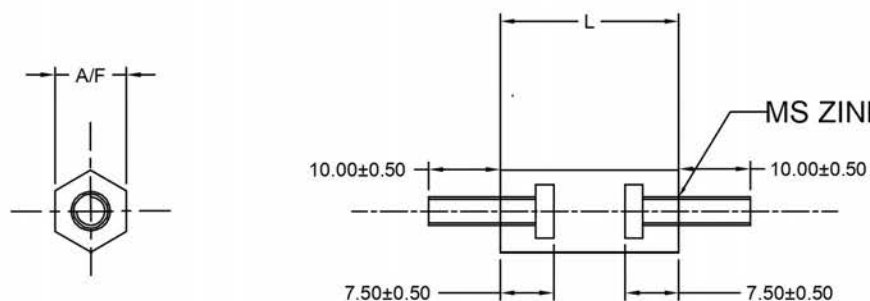

		TOLERANCE UNLESS OTHERWISE STATED	±0.2 ANGLE ±0°10'
HEAT TREATMENT	N.A		UNIT MM
MATERIAL	30% GF NYLON 6 BLACK	DATE 26.9.2016	QTY.
TITLE	HEX SPACER MOLDED WITH INSERTS HEAVY DUTY	DRG.NO.	119
		SCALE 1:1	SHEET 1 OF 1

Brass Insert with M4 Tapping

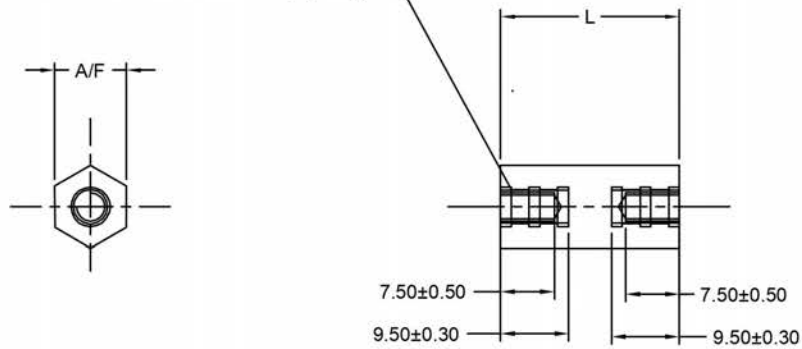


AVAILABLE SIZES

A/F	L	THREADING	PART CODE
10	25	M4	SME1025M4NN
10	30	M4	SME1030M4NN
10	35	M4	SME1035M4NN
10	40	M4	SME1040M4NN

		TOLERANCE UNLESS OTHERWISE STATED	±0.2 ANGLE +0°10'
HEAT TREATMENT	N.A		UNIT MM
MATERIAL	30% GF NYLON 6 BLACK	DATE 26.9.2016	QTY.
TITLE	HEX SAPCESR MOLDED WITH INSERTS HEAVY DUTY	DRG.NO. 119	
		SCALE 1:1	SHEET 1 OF 1

AVAILABLE SIZES

A/F	L	THREADING	PART CODE
10	20	M5	SME1020M5NS
10	25	M5	SME1025M5NS
10	30	M5	SME1030M5NS
10	35	M5	SME1035M5NS
10	40	M5	SME1040M5NS

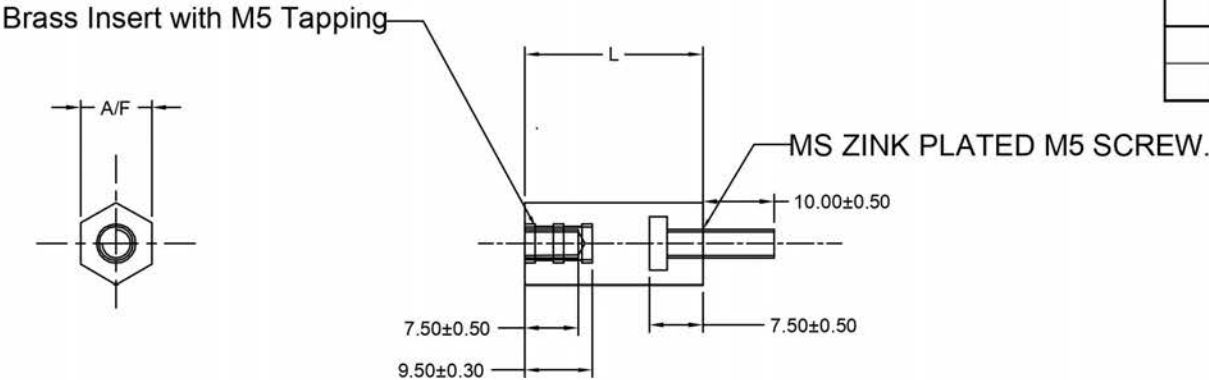


		TOLERANCE UNLESS OTHERWISE STAT ED	±0.2 ANGLE +0°10'
HEAT TREATMENT	N.A		UNIT MM
MATERIAL	30% GF NYLON 6 BLACK	DATE 26.9.2016	QTY.
TITLE	HEX SAPCESR MOLDED WITH INSERTS HEAVY DUTY	DRG.NO. 119	
		SCALE 1:1	SHEET 1 OF 1



AVAILABLE SIZES

A/F	L	THREADING	PART CODE
10	25	M5	SME1025M5NN
10	30	M5	SME1030M5NN
10	35	M5	SME1035M5NN
10	40	M5	SME1040M5NN

Brass Insert with M5 Tapping

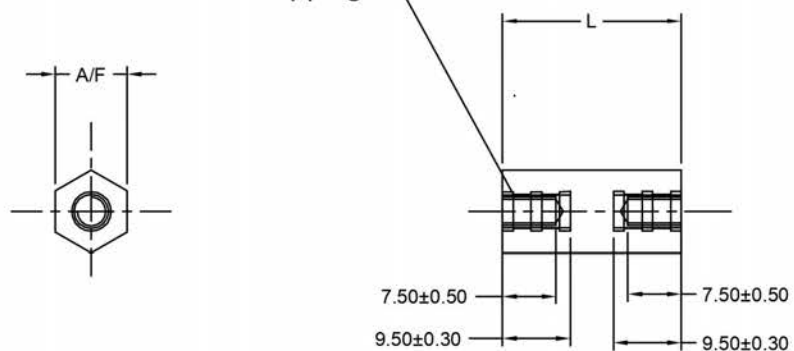

		TOLERANCE UNLESS OTHERWISE STATED	+0.2 -0 +0°10'
HEAT TREATMENT	N.A		UNIT MM
MATERIAL	30% GF NYLON 6 BLACK	DATE 26.9.2016	QTY.
TITLE	HEX SAPCESR MOLDED WITH INSERTS HEAVY DUTY	DRG.NO. 119	
		SCALE 1:1	SHEET 1 OF 1

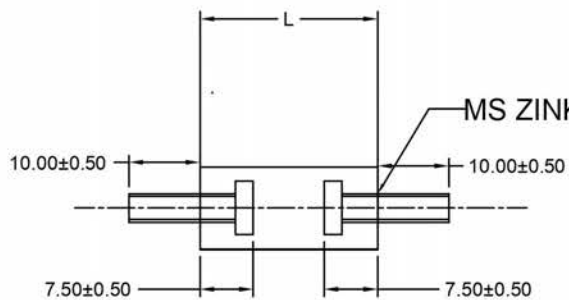


AVAILABLE SIZES

A/F	L	THREADING	PART CODE
10	20	M5	SME1020M5SS
10	25	M5	SME1025M5SS
10	30	M5	SME1030M5SS
10	35	M5	SME1035M5SS
10	40	M5	SME1040M5SS

		TOLERANCE UNLESS OTHERWISE STATED	±0.2 ANGLE +0°10'
HEAT TREATMENT	N.A		UNIT MM
MATERIAL	30% GF NYLON 6 BLACK	DATE 26.9.2016	QTY.
TITLE	HEX SAPCESR MOLDED WITH INSERTS HEAVY DUTY	DRG.NO. 119	
		SCALE 1:1	SHEET 1 OF 1

AVAILABLE SIZES

A/F	L	THREADING	PART CODE
10	20	M4	SME1020M4NS
10	25	M4	SME1025M4NS
10	30	M4	SME1030M4NS
10	35	M4	SME1035M4NS
10	40	M4	SME1040M4NS

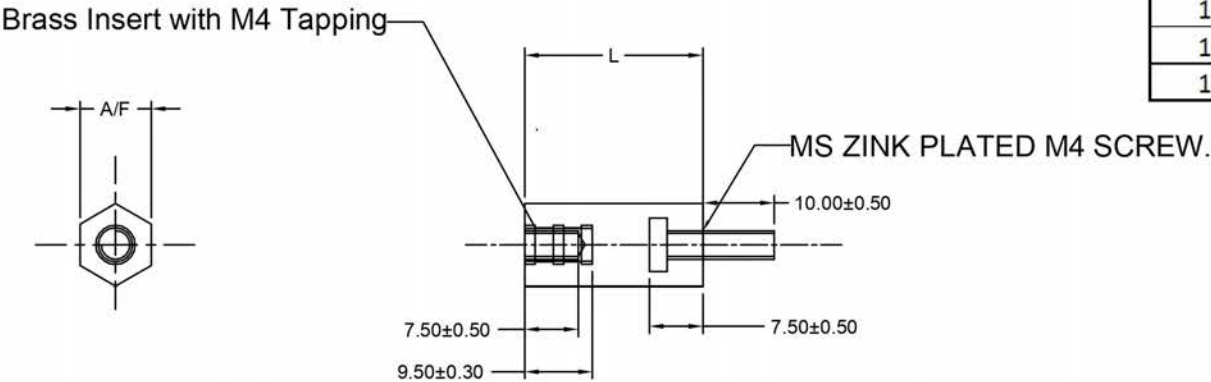

		TOLERANCE UNLESS OTHERWISE STAT ED	± 0.2 ANGLE $\pm 0'10''$
HEAT TREATMENT	N.A		UNIT MM
MATERIAL	30% GF NYLON 6 BLACK	DATE 26.9.2016	QTY.
TITLE	HEX SAPCESR MOLDED WITH INSERTS HEAVY DUTY	DRG.NO. 119	
		SCALE 1:1	SHEET 1 OF 1