

1/2 to 10 tons Capacities



For the ultimate flexibility in a hand chain hoist, the CM Hurricane 360° is the choice for a wide range of applications. The patented hand chain cover rotates a full 360 degrees to allow loads to be lifted, pulled, or positioned from virtually any angle. In addition to providing maximum versatility, this unit offers a convenient way to maneuver loads without standing under the load. The Hurricane 360° allows workers to view hand chain hoists in a whole new light and provides a tool for addressing unique jobs in a broad range of environments.

TRUSTED RELIABILITY

Braking power of our Weston-Style Braking System which provides positive load control & reliable performance.

Minimal maintenance and easily disassembled with no special tools.

SAFETY

Standard Load Limiter for simple, automatic overload protection.

BUILT TO LAST

All internal gears and pinions are heat treated steel for high strength and long life.

Precision 4-Pocket Liftwheel and Chain Guide provides better chain fit and alignment which reduces wear and increases chain life.

RUGGED TOUGHNESS

Powder Coated Finish for corrosion protection.


Alloy hardened Steel Load Chain assures high strength and long wear life.

Meets ASME B30.16 and European CE Standard.

Lifetime Warranty.



1/2 to 10 tons Capacities

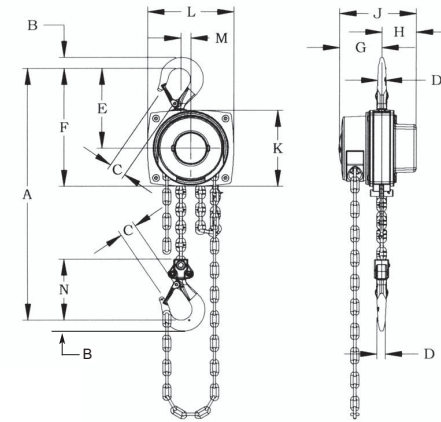

Product Code	Load Rating (Tonne)	Lift (ft.)	Net Weight (lbs.)	Hand Chain Pull to Lift Rated Load (lbs.)	Hand Chain Over-hauled to Lift Load One Foot (ft.)	Dimensions (in)													
						A	B	C	D	E	F	G	H	J	K	L	M	N	
5623A 5624A 5625A	½	10 15 20	20 21 23	44	30	11 13/16	11/16	15/16	9/16	5 1/2	8 1/8	3 3/8	2 3/8	5 13/16	5 1/4	5 13/16	15/16	4 5/16	
5626A 5627A 5628A	1	10 15 20	29 31 34	54	49	13 3/16	7/8	1 1/8	3/4	6 7/16	9 1/2	3 7/8	2 3/4	6 5/8	6 1/8	6 7/8	15/16	4 15/16	
5629A 5630A 5631A	2	10 15 20	44 49 53	74	71	15 9/16	1 3/16	1 3/8	7/8	7 9/16	11 1/8	4 3/8	3 1/4	7 5/8	7 3/16	8	1 1/4	6 1/8	
5635A 5636A 5637A	3	10 15 20	64 71 78	92	87	20 1/2	1 1/2	1 9/16	1 3/16	8 7/8	13 3/16	4 7/8	3 3/4	8 5/8	8 11/16	9 13/16	1 5/16	7	
5639A 5640A 5641A	5	10 15 20	84 98 113	76	174	25 3/4	1 3/4	1 7/8	1 7/16	9 1/2	13 7/8	4 7/8	3 3/4	8 5/8	8 11/16	9 13/16	13/16	11 1/4	
5643A 5644A 5645A	10	10 15 20	157 178 200	102	261	32 1/2	2 11/16	2 11/16	1 15/16	12 13/16	17 3/16	4 7/8	3 3/4	8 5/8	8 11/16	15 1/16	5 3/8	15 13/16	